

# Evolving Vision-Based Flying Robots

Jean-Christophe Zufferey, Dario Floreano,  
Matthijs van Leeuwen, Tancredi Merenda

Autonomous Systems Laboratory (asl.epfl.ch), Institute of Systems Engineering,  
Swiss Federal Institute of Technology (EPFL), CH-1015, Lausanne, Switzerland

**Abstract.** We describe a set of experiments where miniature flying robots evolve the ability to fly in a textured room using only visual information and neuro-morphic control. The architecture of a spiking neural circuit, which is connected to the vision system and to the motors, is genetically encoded and evolved on the physical robot without human intervention. The flying robot consists of a small wireless airship equipped with a linear camera and a set of sensors used to measure its performance. Evolved spiking circuits can manage to fly the robot around the room by exploiting a combination of visual features, robot morphology, and interaction dynamics.

## 1 Bio-inspired Vision for Flying Robots

Our goal is to develop autonomous miniature (approximately 80 cm, 50 g) flying robots [1]. Some research teams are working on even smaller dimensions (2 to 5 cm) [2,3], but their efforts are essentially concentrated on mechatronics issues. A major challenge for miniature flying robots is the ability to navigate autonomously in complex environments. Conventional distance sensors (laser, ultrasonic) cannot be used for these systems because of their weight. Vision is an interesting sensor modality because it can be lightweight and low-power. However, the mainstream approach to computer vision, based on segmentation, object extraction, and pattern recognition, is not always suitable for small behavioural systems that are unable to carry powerful processors and related energy sources.

An alternative consists of taking inspiration from simple circuits and adaptive mechanisms used by living organisms. A pioneering work in this direction was achieved by Franceschini et al. [4], who developed a wheeled robot with a vision system inspired upon the visual system of the fly. The 10 kg synchro-drive robot featured an artificial compound eye with 100 discrete photoreceptors and was able to freely navigate at about 50 cm/s toward a light source while avoiding randomly arranged obstacles. Other successful realisations followed (for review, see [5]), but unlike the robot by Franceschini et al., where computation was executed onboard by analog electronics, those machines demanded more computing power and were therefore linked to offboard computers for image processing. More recent work has attempted to use bio-inspired visual algorithms in flying agents, but these preliminary developments have been limited to tethered aircraft [6] and simulated flight [7].



**Fig. 1.** Evolutionary vision-based robots. *Left:* The Khepera robot equipped with a linear camera (16 pixels,  $36^\circ$  FOV) was positioned in an arena with randomly sized black and white stripes. Random size was used to prevent development of trivial solutions whereby the control system would use the size of the stripes to measure distance from walls and self-motion. The robot was connected to a workstation through rotating contacts that provided serial data transmission and power supply. *Right:* The blimp-like flying robot, provided with a similar linear camera (16 pixels,  $150^\circ$  FOV), is closed in a  $5 \times 5 \times 3$  m room with randomly sized black and white stripes on the walls. The serial data transmission is handled by a Bluetooth wireless connection and power supply by an onboard battery lasting approximately three hours.


The control systems of the robots mentioned above were 'hand-designed'. Some authors proposed to evolve vision-based navigation [8,9]. For example, Huber applied genetic algorithms to simulated 2D agents [10]. Those agents were equipped with only four photoreceptors making up two elementary motion detectors (EMD), symmetrically placed on each side of the agent. The parameters of those EMDs as well as the position and field of view (FOV) of the photoreceptors were evolved. The best individuals could successfully navigate in a simulated corridor with textured walls and obstacles. The simulation was rather simple though, especially because inertial forces were not taken into consideration.

In previous work [11], we evolved the architecture of spiking neural networks capable of steering a vision-based, wheeled robot. A Khepera robot with a linear camera was asked to navigate in a rectangular arena with textured walls (figure 1, left). The best individuals were capable of moving forward and avoiding walls very reliably. However, the complexity of the dynamics of this terrestrial robot is much simpler than that of flying agents.

In this paper, we extend that approach to a flying robot (figure 1, right) that is expected to navigate within a room using only visual information. Genetic algorithms [?] are used to evolve the architecture of a spiking circuit, which connects low resolution visual input to the motors of a small indoor airship.

In the following section, we describe the main challenges of running evolution with real flying systems and give an overview of the experimental setup (figure 1). Section 3 summarizes the evolutionary and neural dynamics. The results

are presented in section 4. Finally, a discussion and future work description are presented in section 5.

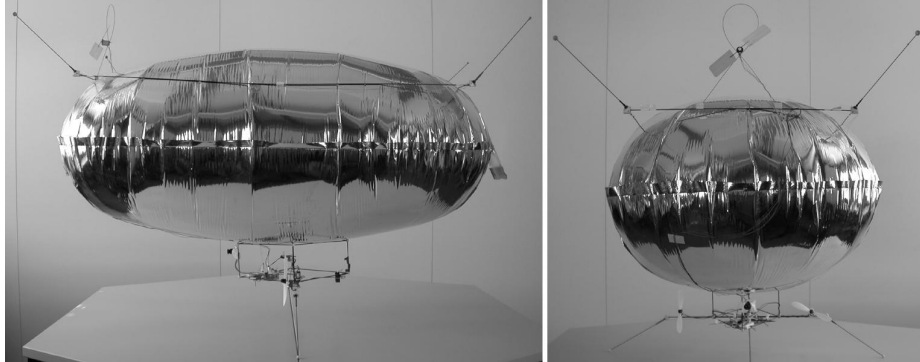


**Fig. 2.** The blimp features an elliptic envelope (100x60x45 cm) filled with helium for a lift capacity of approximately 250 g. On top and below the envelope are attached frames made of carbon fiber rods that support six bumpers (4 on top and 2 below) for collision detection. It is equipped with three engines (miniature DC motor, gear, propeller): two for horizontal movement (forward, backward and rotation around yaw axis) and one for vertical movement. In order to measure the relative forward airspeed, an anemometer (free rotating balsa-wood propeller with a mouse optical encoder) has been mounted on top of the envelope. The system is able to qualitatively measure airspeeds below 10 cm/s. A distance sensor has been mounted below the gondola and oriented toward the floor for altitude control in the preliminary experiments.

## 2 Experimental Setup

Evolving aerial robots brings a new set of challenges. The major issues of developing (evolving, learning) a control system for an airship, with respect to a wheeled robot, are (1) the extension to three dimensions<sup>1</sup>, (2) the impossibility to communicate to a computer via cables, (3) the difficulty of defining and measuring performance, and (4) the more complex dynamics. For example, while the Khepera is controlled in speed, the blimp is controlled in thrust (speed derivative) and can slip sideways. Moreover, inertial and aerodynamic forces play a major role. Artificial evolution is a promising method to automatically develop control systems for complex robots [13], but it requires machines that are capable of moving for long periods of time without human intervention and withstand shocks.

---

<sup>1</sup> Although the first experiments described hereafter are limited to 2D by the use of a pre-designed altitude regulator.

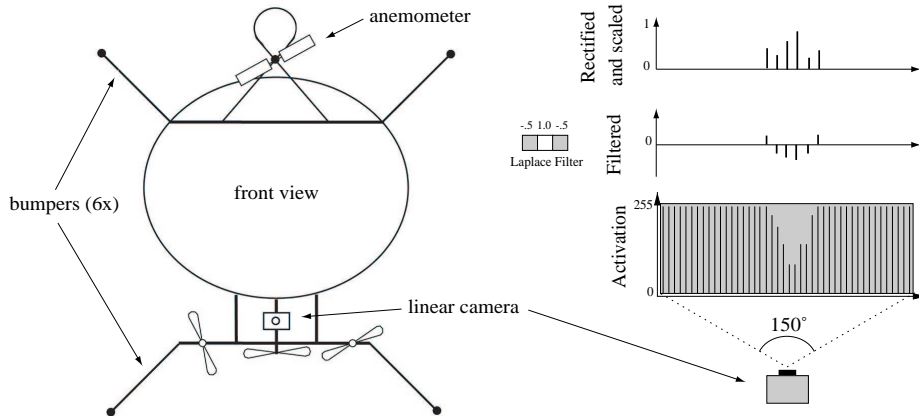

**Fig. 3.** *Left:* The blimp and its main components: the anemometer on top of the envelope, the bumpers, the three engines, and the linear camera pointing forward with  $150^\circ$  FOV giving an horizontal image of the vertical stripes. *Right:* Contrast detection is performed by selecting 16 equally spaced photoreceptors and filtering them through a Laplace filter spanning three photoreceptors. Filtered values are then rectified and scaling in the range  $[0,1]$ . These values represent the probability of emitting a spike for each corresponding neuron. The linear camera fixed on the gondola is the only source of information for the evolutionary spiking network.


Those requirements led us to the development of the blimp shown in figure 2. All onboard electronic components are connected to a Microchip PIC<sup>TM</sup> microcontroller with a wireless connection to a desktop computer. The bidirectional digital communication with the desktop computer is handled by a Bluetooth radio module, allowing more than 15 m range. The energy is provided by a Lithium-Ion battery, which lasts more than 3 hours under normal operation, during evolutionary runs. For purpose of analysis, the evolutionary algorithm and spiking circuits are implemented on the desktop computer which exchanges sensory data and motor commands with the blimp every 100 ms.<sup>2</sup>

In these experiments, a simple linear camera is attached in front of the gondola (figure 3), pointing forward. The fish-eye-view lens gives a  $150^\circ$  FOV mapped onto 16 photoreceptors whose activations are convolved with a Laplace filter. The Laplace filter detects contrast over three adjacent photoreceptors.

### 3 Evolving Spiking Circuits

The evolutionary method and the spiking controller are very similar to what is described in [11]. The connectivity pattern and neuron signs of a network of 10 spiking neurons connected to 16 spiking visual receptors is genetically encoded


<sup>2</sup> An adapted form of the evolutionary algorithm and spiking circuit could be run on the onboard PIC microcontroller [15], but data analysis would be limited.

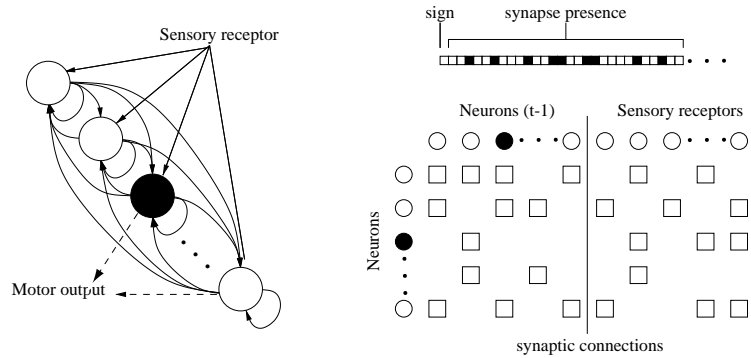

**Fig. 4.** Network architecture (only a few neurons and connections are shown) and genetic representation of one neuron. *Left:* A conventional representation showing the network architecture. Four neurons, two for each side, are used to set the speeds of the two horizontal propellers in a push-pull mode. *Right:* The same network unfolded in time (neurons as circles, synaptic connections as squares). The neurons on the column receive signals from connected neurons and receptors shown on the top row. The first part of the row includes the same neurons at the previous time step to show the connections among neurons. Sensory neurons do not have interconnections. The signs of the neurons (white = excitatory, black = inhibitory) and their connectivity pattern is encoded in the genetic string and evolved.

and evolved using a standard genetic algorithm [?] with a population of 60 individuals sequentially evaluated on the same physical robot. The architecture is genetically represented by a binary string composed of a series of blocks, each block corresponding to a neuron. The first bit of a block encodes the sign of the corresponding neuron (1, -1) and the remaining  $n + s$  bits encode the presence/absence (1, 0) of a connection from the  $n$  neurons and from the  $s$  visual receptors (figure 4). The synaptic strengths of all existing connections are set to 1. The spiking neuron model includes the response profile of synaptic and neuron membranes to incoming spikes, time delays to account for axon length, and membrane recovery profile of the refractory period [14]. The parameter values for the equations are predefined and fixed for all networks (no tuning has been done on these parameter values).

Each individual of the population is tested on the robot two times for 40 seconds each (400 sensory-motor steps). The fitness function is the amount of estimated forward motion  $\hat{v}$  detected by the anemometer at every time step  $t$  (100 ms) averaged over all  $T$  time steps available ( $T=800$ ):  $\Phi = \frac{1}{T} \sum_t \hat{v}^t$ . After each 40 s test, a preprogrammed random movement of 5 seconds is executed to create a randomised initial situation for the next test.

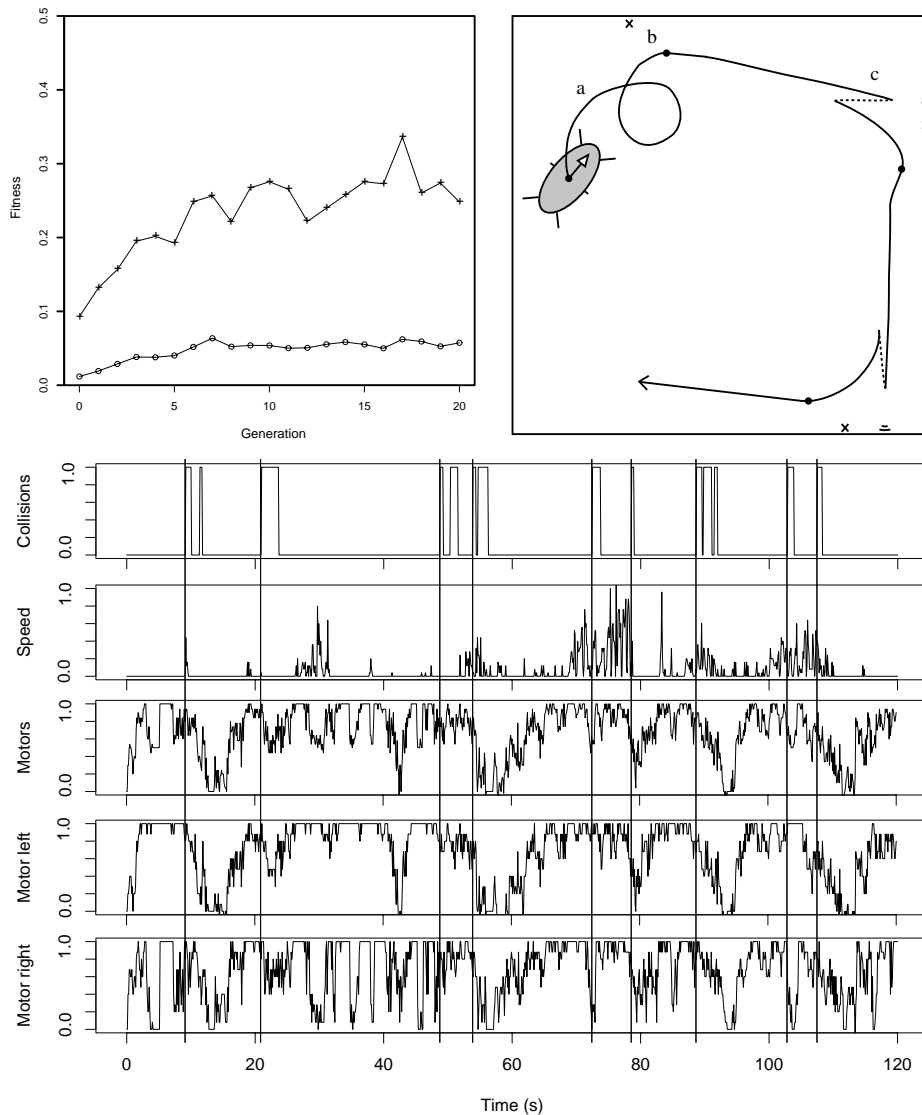

**Fig. 5.** *Top left:* Average fitness values of five evolutionary runs (best fitness = crosses, average fitness = circles). Each data point is the average of five evolutionary runs starting with different random initialization of the chromosomes. *Top right:* Hand-drawn estimation of the typical path of the selected best individual (solid line = forward movement; dashed line = backward movement; small curves = front collision; cross and circle = place of collision with left back bumper). *Bottom:* Performance of the best selected individual during two minutes. The upper graph shows collisions, as detected by the bumpers. The second graph shows an approximation of the forward speed, as measured with the anemometer. The motor graphs show the forward thrust of the propellers, which is given by the neural network output ('Motors' is the average of both motors). Each vertical line indicates the start of a collision. Multiple collisions on the top graph are generated by the switches of the bumpers as the robot touches the walls. Note that the front and back collisions are not discriminated.

## 4 Results

We performed five evolutionary runs, each starting with a different random initialization (figure 5, top left). All best evolved individuals of the five runs developed efficient strategies in less than 20 generations (2-3 days) to navigate around the room in the forward direction. Interestingly, walls are actively used by the robot to stabilise the trajectory. Remember that the fitness function (section 3) does not ask individuals to avoid walls, but only to maximize forward motion.

The trajectory of a typical best individual is shown on the top right plot of figure 5. It starts with a rotational movement due to the previous random movement (a) and keeps rotating until it hits a wall, which stabilises its course (b). It then moves straight forward until a wall is hit frontally (c), the motors are turned off, and the robot bumps backward. When the robot is free from the wall, the motors are turned on to move forward again. Once again, a wall is used to stabilise the course and the same strategy is repeated over and over again.

The evolved spiking circuit clearly reacts when it hits the wall by turning off the motors, although the only input to the neural network is vision data. This behaviour can be seen also in the pattern of motor activity shown in the bottom graphs of figure 5, which indicates a strong correlation between a collision event and change of motor speeds. In addition, the evolved spiking circuit is sensitive to motion. When the pattern of contrast on the retina is static, the robot turns the motors off. This situation typically happens when the robot is very close to a wall.

## 5 Conclusion

These initial explorations with simple neuromorphic vision controllers for flying robots indicate that artificial evolution can discover efficient (and unexpected) solutions that capitalize on a combination of visual information and interaction dynamics between the physical system and its environment. These evolved solutions can not only encompass visual mechanisms already discovered in insects (such as forms of elementary motion detection), but also incorporate new “tricks” that may, or may not, be used by biological flying organisms.

In current work, we are investigating the behavioural effects of different types of imaging devices (such as aVLSI retina) and preprocessing filters (temporal, spatial, spatio-temporal, EMDs, etc.). A 3D flight simulator under development will help us to speed up evolutionary runs, let the sensor morphology evolve along with the controller, but will require proper handling of the issues related to the differences between simulation and real world. This last point will probably be approached by evolving hebbian-like synaptic plasticity, which we have shown to support fast self-adaptation to changing environments [16]. Eventually, our goal is to apply this approach to indoor slow flyers with wings, instead of airships.

## Acknowledgements

This work was supported by the Swiss NSF grant No. 620-58049. The authors are grateful to Jean-Daniel Nicoud ([www.didel.com](http://www.didel.com)) for providing parts and support for building the blimp, and to Cyril Halter for the wind tunnel tests. Portescap ([www.portescap.com](http://www.portescap.com)) provided the motors equipping the blimp and Sensile ([www.sensile.ch](http://www.sensile.ch)) the force gauges for the wind tunnel setup.

## References

1. Nicoud, J.D., Zufferey, J.C.: Toward Indoor Flying Robots. To appear in proceedings of IEEE/RSJ International Conference on Intelligent Robots and Systems (2002)
2. Fearing, R.S., Chiang, K.H., Dickinson, M.H., Pick, D.L., Sitti, M., Yan, J.: Wing Transmission for a Micromechanical Flying Insect. IEEE Int. Conf. Robotics and Automation (2000)
3. Kroo, I., et al.: The Mesicopter: A Meso-Scale Flight Vehicle. <http://aero.stanford.edu/mesicopter/>
4. Franceschini, N., Pichon, J.M., Blanes, C.: From insect vision to robot vision. Phil. Trans. R. Soc. Lond. B, 337, pp. 283-294 (1992)
5. Weber, K., Venkatesh, S., Srinivasan, M.V.: Insect Inspired Behaviours for the Autonomous Control of Mobile Robots. From Living Eyes to Seeing Machines, pp. 226-248 (1997)
6. Netter, T., Franceschini, N.: A Robotic Aircraft that Follows Terrain Using a Neumorphic Eye. To appear in proceedings of IEEE/RSJ International Conference on Intelligent Robots and Systems (2002)
7. Neumann, T.R., Bülthoff, H.H.: Insect Inspired Visual Control of Translatory Flight. ECAL (2001)
8. Harvey, I., Husbands, P., Cliff, D.: Seeing the Light: Artificial Evolution, Real Vision. In: From Animals to Animats III, MIT Press, pp. 392-401 (1994)
9. Dale, K., Collett, T.S.: Using artificial evolution and selection to model insect navigation. Current Biology, 11:1305-1316 (2001)
10. Huber, S.A., Mallot, H.A., Bülthoff, H.H.: Evolution of the sensorimotor control in an autonomous agent. In: Proceedings of the Fourth International Conference on Simulation of Adaptive behaviour, MIT Press, pp. 449-457 (1996)
11. Floreano, D., Mattiussi, C.: Evolution of Spiking Neural Controllers for Autonomous Vision-Based Robots. In Gomi, T., ed., Evolutionary Robotics. From Intelligent Robotics to Artificial Life. Tokyo: Springer Verlag (2001)
12. Goldberg, D.E.: Genetic Algorithms in Search, Optimization and Machine Learning. Reading, MA: Addison-Wesley (1989)
13. Nolfi, S., Floreano, D.: Evolutionary Robotics: Biology, Intelligence, and Technology of Self-Organizing Machines. Cambridge, MA: MIT Press. 2nd print (2001)
14. Gerstner, W.: Associative memory in a network of biological neurons. In Lippmann, R.P.; Moody, J.E.; and Touretzky, D.S., eds., Advances in Neural Information processing Systems 3. San Mateo, CA: Morgan Kaufmann. 84-90 (1991)
15. Floreano, D., Schoeni, N., Caprari, G., Blynal, J.: Evolutionary Bits'n'Spikes. Technical report (2002)
16. Urzelai, J., Floreano, D.: Evolutionary Robotics: Coping with Environmental Change. In Proceedings of the Genetic and Evolutionary Computation Conference (2000)